

SECTION E

ELECTRICAL COMPONENT NOMENCLATURE AND DATA

TOPICS

Potential Relay Nomenclature.....	E1
G.E. Numbering System	E1
Potential Relay Data	E2
Current Relay Data	E6
Start Capacitor Data.....	E13
Run Capacitor Data.....	E21


This section contains current information on Copeland® products. Information on obsolete models can be obtained from your local wholesaler carrying Copeland products.

Potential Relay Nomenclature

General Electric has somewhat of a complicated numbering system for potential relays. Without a complete catalog, the numbering designations are not self-explanatory, but a basic understanding of the nomenclature is helpful in identifying potential replacements in an emergency situation.

G.E. Numbering System

A typical General Electric potential relay number is as follows: 3ARRA3CT6D5

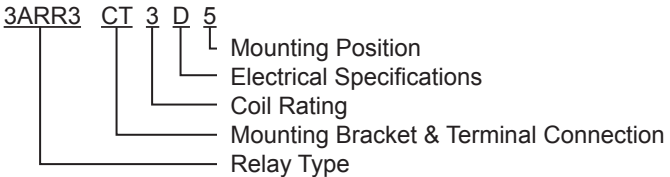

Potential Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Pick-up Volts	Drop Out Volts	Cont. Volt Rating	Freq.
940-0001-48	040-0001-48	3ARR3KC7M5	150 - 160	15 - 45	130	60
940-0001-53	040-0001-53	3ARR3KC10A5	260 - 280	50 - 110	375	60
940-0001-54	040-0001-54	3ARR3KC10V5	240 - 260	60 - 121	375	60
940-0001-55	040-0001-55	3ARR3KC10S5	190 - 200	40 - 105	375	60
940-0001-56	040-0001-56	3ARR3KC3T5	200 - 220	40 - 90	332	60
940-0001-59	040-0001-59	3ARR3KC6W5	210 - 230	60 - 125	420	60
940-0001-60	040-0001-60	3ARR3KC24S5	190 - 200	55 - 115	383	60
940-0001-62	040-0001-62	3ARR3KC5M5	150 - 160	35 - 77	253	60
940-0001-63	040-0001-63	3ARR3KC10C5	300 - 320	50 - 110	375	60
940-0001-64	040-0001-64	3ARR3KC6A5	260 - 280	60 - 121	420	60
940-0001-69	040-0001-69	3ARR3KC4D5	320 - 340	60 - 135	500	60
940-0001-71	040-0001-71	3ARR3KC10B5	280 - 300	50 - 110	375	60
940-0001-78	040-0001-78	3ARR3KC10AS5	190 - 200	40 - 105	338	50
940-0001-79	040-0001-79	3ARR3KC3P5	170 - 180	40 - 90	332	60
940-0001-80	040-0001-80	3ARR3KC2L5	140 - 150	20 - 45	168	60
940-0001-82	040-0001-82	3ARR3KC3U5	220 - 240	40 - 90	332	60
940-0001-64	040-0001-87	3ARR3J6A5	260 - 280	60 - 121	420	60
940-0001-88	040-0001-88		220 - 240	60 - 121	420	60
940-0007-00	040-0007-00	3ARR3C7M2	150 - 160	15 - 45	130	60
940-0007-02	040-0007-02	3ARR3C5AA2	260 - 280	35 - 77	228	50
940-0007-04	040-0007-04	3ARR3C24E2	340 - 360	55 - 125	336	60
940-0046-18	040-0046-18	3ARR22J24E5	340 - 360	55 - 125	383	60

Potential Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Pick-up Volts	Drop Out Volts	Cont. Volt Rating	Freq.
940-0046-19	040-0046-19	3ARR22J6D5	320 - 340	60 - 121	420	60
	040-0046-20	3ARR22J5P5	170 - 180	35 - 77	253	60
	040-0046-21	3ARR22J7M5	150 - 160	15 - 45	130	60
	040-0046-22	3ARR22J25AC5	300 - 320	60 - 133	400	50
	040-0046-23	3ARR22J10B5	280 - 300	50 - 110	375	60
	040-0046-24	3ARR22J4AD5	320 - 340	60 - 135	0	
940-0140-00	040-0140-00	3ARR3KC6AC5	300 - 320	60 - 121	378	50
940-0140-00	040-0166-00	3ARR3T6AC5	300 - 320	60 - 121	343	50
940-0140-02	040-0166-01	3ARR3T4AA5	260 - 280	60 - 135	395	50
940-0140-03	040-0166-02	3ARR3T25S5	190 - 200	60 - 130	395	60
940-0140-04	040-0166-03	3ARR3T3S5	190 - 200	40 - 90	290	60
940-0140-05	040-0166-04	3ARR3T6AA5	260 - 280	60 - 121	343	50
940-0140-06	040-0166-05	3ARR3T10AT5	200 - 220	40 - 105	296	50
940-0140-08	040-0166-07	3ARR3KC3L5	140 - 150	40 - 90	290	60
940-0001-48	040-0166-08	3ARR3T7M5	150 - 160	15 - 45	114	60
940-0001-49	040-0166-09	3ARR3T3E5	340 - 360	50 - 100	290	60
940-0001-50	040-0166-10	3ARR3T24E5	340 - 360	55 - 125	336	60
940-0001-51	040-0166-11	3ARR3T5P5	170 - 180	35 - 77	221	60
940-0001-52	040-0166-12	3ARR3T25AC5	300 - 320	60 - 133	406	50
940-0001-53	040-0166-13	3ARR3T10A5	260 - 280	50 - 110	375	60
940-0001-54	040-0166-14	3ARR3T10V5	240 - 260	60 - 121	375	60
940-0001-55	040-0166-15	3ARR3T10S5	190 - 200	40 - 105	375	60

Potential Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Pick-up Volts	Drop Out Volts	Cont. Volt Rating	Freq.
940-0001-57	040-0166-17	3ARR3T23AA5	260 - 280	45 - 109	262	50
940-0001-59	040-0166-18	3ARR3T6W5	210 - 230	60 - 125	420	60
940-0001-60	040-0166-19	3ARR3T24S5	190 - 200	55 - 115	383	60
940-0001-61	040-0166-20	3ARR3T6D5	320 - 340	60 - 121	420	60
940-0001-62	040-0166-21	3ARR3T5M5	150 - 160	35 - 77	253	60
940-0001-63	040-0166-22	3ARR3T10C5	300 - 320	50 - 110	375	60
940-0001-64	040-0166-23	3ARR3T6A5	260 - 280	60 - 121	420	60
940-0001-65	040-0166-24	3ARR3T10AA5	260 - 280	50 - 110	338	50
940-0001-66	040-0166-25	3ARR3T3C5	300 - 320	55 - 100	332	60
	040-0166-26	3ARR3T10AB5	280 - 300	50 - 110	338	50
940-0001-68	040-0166-27	3ARR3T6V5	240 - 260	60 - 121	420	60
940-0001-69	040-0166-28	3ARR3T4D5	320 - 340	60 - 135	500	60
940-0001-70	040-0166-29	3ARR3T3AV5	240 - 260	40 - 90	299	50
940-0001-71	040-0166-30	3ARR3T10B5	280 - 300	50 - 110	375	60
940-0001-72	040-0166-31	3ARR3T6AB5	280 - 300	60 - 121	378	50
940-0001-73	040-0166-32	3ARR3T3AU5	220 - 240	40 - 90	299	50
940-0001-75	040-0166-33	3ARR3T7J5	120 - 130	15 - 40	130	60
	040-0166-34	3ARR3T7AL5	140 - 150	15 - 40	117	50
940-0001-77	040-0166-35	3ARR3T5V5	240 - 260	35 - 77	253	60
940-0001-78	040-0166-36	3ARR3T10AS5	190 - 200	40 - 105	338	50
940-0001-79	040-0166-37	3ARR3T3P5	170 - 180	40 - 90	332	60
940-0001-80	040-0166-38	3ARR3T2L5	140 - 150	20 - 45	168	60

Potential Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Pick-up Volts	Drop Out Volts	Cont. Volt Rating	Freq.
940-0001-82	040-0166-39	3ARR3T3U5	220 - 240	40 - 90	332	60
940-0001-83	040-0166-40	3ARR3K6A5	260 - 280	60 - 121	420	60
940-0001-84	040-0166-41	3ARR3K6B5	280 - 300	60 - 121	420	60
	040-0166-42	3ARR3K4B5	280 - 300	60 - 135	500	60
	040-0166-43	3ARR3K4A5	260 - 280	60 - 135	500	60
940-0001-64	040-0166-44	3ARR3T6A5	260 - 280	60 - 121	420	60
940-0001-88	040-0166-45	3ARR3T6U5	220 - 240	60 - 121	420	

Current Relay Data

Wholesaler P/N	Copeland® P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
940-0088-00	040-0088-00		6409-26-196	28.9	23.7
940-0088-03	040-0088-03		6409-26-176	14.9	12.6
940-0088-04	040-0088-04		6409-26-935	33.6	27.8
940-0088-05	040-0088-05		6409-26-189	21.8	17.9
	040-0088-06		6409-26-900	42	36
	040-0089-04		3CR-203-171B	12.9	10.8
	040-0089-06		3CR-203-186B	22.5	18.7
940-0090-00	040-0090-00		3CR-206-174B	14.1	11.9
940-0090-01	040-0090-01		3CR-206-181B	17.9	15.1
940-0090-04	040-0090-04		3CR-206-191B	27.2	22.7
	040-0090-05		3CR-206-165B	10.4	8.6
940-0090-06	040-0090-06		3CR-206-189B	24.75	20.45
	040-0090-07		3CR206-154B	8.25	6.9
940-0098-01	040-0098-01		6409-40-935	33.6	27.8
940-0098-02	040-0098-02		6409-40-180	17.4	14.3
940-0102-02	040-0102-02		6409-51-176	14.9	12.6
940-0115-00	040-0115-00		3CR-111-269	12.2	10.2
	040-0115-01		3CR-111-239	6.3	5.25
	040-0115-02		3CR-111-272	13.3	11.1
940-0090-01	040-0128-01		3CR234-181B	17.9	15.1
940-C411-49	040-0141-00			7.7	6.5
940-C411-18	040-0141-01			3.8	3.25
940-C411-38	040-0141-02			6.2	5.25

Current Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
940-C411-47	040-0141-03			7.45	6.3
940-C411-58	040-0141-04			9.15	7.7
940-C411-82	040-0141-05			17.8	14.9
940-C411-52	040-0141-10			8.2	7
940-C411-66	040-0141-14			11	9.35
940-C411-72	040-0141-17			13.2	11.1
940-C411-73	040-0141-18			13.4	11.4
940-C411-79	040-0141-20			16.5	13.8
940-C411-80	040-0141-21			16.7	14
940-C411-83	040-0141-22			18.2	15.3
940-C411-82	040-0150-01			17.8	14.9
940-C411-66	040-0150-02			11	9.35
940-C411-49	040-0150-03			7.7	6.5
940-C411-45	040-0150-04			7.1	6
940-C411-58	040-0150-05			9.15	7.7
940-C411-83	040-0150-06			18.2	15.5
940-C411-13	040-0150-07			3.25	2.75
940-C411-18	040-0150-08			3.8	3.25
940-C411-35	040-0150-09			5.8	4.95
940-C411-63	040-0150-10			10.3	8.6
940-C411-89	040-0150-11			21.9	18.2
940-C411-91	040-0150-12			24.4	20.3
940-C411-78	040-0150-13			15.8	13.3

Current Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
940-C411-47	040-0150-14			7.45	6.3
940-C411-61	040-0150-15			9.75	8.2
940-C411-52	040-0150-16			8.2	7
940-C411-85	040-0150-17			19.2	16.2
940-C411-73	040-0150-18			13.35	11.35
940-C411-72	040-0150-19			13.2	11.1
940-C411-71	040-0150-20			12.7	10.8
940-C411-40	040-0150-21			6.5	5.5
940-C411-38	040-0150-22			6.2	5.25
	040-0150-23			21.9	18.2
940-0150-24	040-0150-24			15.8	13.3
940-C411-55	040-0150-25			8.5	7.15
940-0150-31	040-0150-31			13.35	11.35
	040-0150-32			12.1	10.3
	040-0150-33			18.2	15.5
	040-0150-34			11	9.35
	040-0150-35			14	11.9
	040-0150-36			14.7	12.5
	040-0150-37			19.9	16.6
	040-0150-42			8.5	7.15
	040-0150-43			15.8	13.3
	040-0150-44			10.3	8.6
	040-0150-45			20.5	17.1

Current Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
	040-0150-46			11.55	9.8
940-0152-00	040-0152-00			7.7	6.5
940-0152-03	040-0152-03			3.76	3.15
940-C401-82	040-0152-13			17.8	14.9
940-0102-02	040-0159-02			14.9	12.6
940-C401-25	040-0162-00			4.65	3.95
940-C401-72	040-0162-01			13.2	11.1
940-C401-35	040-0162-02			5.8	4.95
940-C401-82	040-0162-03			17.8	14.9
940-0152-05	040-0162-04			4.2	3.55
940-C401-58	040-0162-05			9.15	7.7
940-C401-66	040-0162-07			11	9.35
940-C401-40	040-0162-08			6.5	5.5
940-0152-03	040-0162-09			3.35	2.85
940-0152-01	040-0162-10			2.29	1.96
940-0152-00	040-0162-11			7.7	6.5
940-0152-04	040-0162-12			3.76	3.15
940-0162-13	040-0162-13			9.75	8.2
940-C401-72	040-0162-14			13.2	11.1
940-0163-00	040-0163-00			9.15	7.7
940-0163-01	040-0163-01			11	9.35
940-C411-79	040-0163-02			16.5	13.8
940-C411-70	040-0163-03			12.1	10.3

Current Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
940-C411-80	040-0163-04			16.7	14
940-C411-89	040-0163-05			21.9	18.2
940-C411-83	040-0163-06			18.2	15.5
940-C411-91	040-0163-07			24.4	20.3
940-C411-85	040-0163-08			19.2	16.2
940-C411-49	040-0163-10			17.8	14.2
	040-0163-11			10.3	8.6
	040-0163-12			9.75	8.2
	040-0163-13			13.2	11.1
	040-0163-14			12.9	10.8
	040-0163-15			13.7	11.5
	040-0163-16			19.9	16.6
	040-0166-26	3ARR3T10AB5		280	50
	040-0166-26			280	50
940-C411-49	040-0167-03			7.7	6.5
940-C411-38	040-0167-22			6.2	5.25
940-0088-00	040-0168-00			28.9	23.7
940-0088-02	040-0168-01			17.4	14.3
940-0088-03	040-0168-02			14.9	12.6
940-0088-04	040-0168-03			33.6	27.8
940-0088-05	040-0168-04			21.8	17.9
940-0088-07	040-0168-06			13.3	11.1
940-0102-00	040-0169-00			28.9	23.7

Current Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
	040-0169-01			17.4	14.3
940-0102-02	040-0169-02			14.9	12.6
940-0102-03	040-0169-03			33.6	27.8
940-0102-07	040-0169-06			13.3	11.1
940-0163-00	040-0171-00			9.15	7.7
940-C016-00	040-0172-00			24	19.8
940-0102-04	040-0172-02			24.75	20.45
940-C016-03	040-0172-03			30.3	25.1
	040-0172-04			18.4	15.4
940-0172-05	040-0172-05			22.1	18.4
940-0152-01	040-C401-01		9660-040-101	2.29	1.96
	040-C401-11		9660-040-111	3	2.56
940-0152-03	040-C401-14		9660-040-114	3.35	2.85
940-0152-05	040-C401-21		9660-040-121	4.2	3.55
940-C401-25	040-C401-25		9660-040-125	4.65	3.95
940-C401-35	040-C401-35		9660-040-135	5.9	5
940-C401-40	040-C401-40		9660-040-140	6.5	5.5
940-0152-00	040-C401-49		9660-040-149	7.7	6.5
	040-C401-55		9660-040-155	8.5	7.15
940-C401-58	040-C401-58		9660-040-158	9.15	7.7
940-C401-66	040-C401-66		9660-040-166	11	9.2
940-C401-72	040-C401-72		9660-040-172	13.2	11.1
940-C401-82	040-C401-82		9660-040-182	17.8	14.9

Current Relay Data

Wholesaler P/N	Copeland® Brand P/N	GE P/N	Texas Inst. P/N	Max. Pick-up Amps	Min. Drop Out Amps
940-C411-13	040-C411-13		9660B-041-113	3.25	2.77
940-C411-18	040-C411-18			3.8	3.25
940-C411-35	040-C411-35		9660B-041-135	5.9	5
940-C411-38	040-C411-38		9660-041-138	6.2	5.25
940-C411-45	040-C411-45		9660A-041-145	7	5.9
940-C411-47	040-C411-47		9660-041-147	7.4	6.2
940-C411-49	040-C411-49		9660-041-149	7.7	6.5
940-C411-52	040-C411-52			8.1	6.8
940-C411-61	040-C411-61		9660-041-161	9.75	8.2
940-C411-63	040-C411-63		9660-041-163	10.3	8.6
940-C411-66	040-C411-66		9660-041-166	11	9.2
940-C411-71	040-C411-71			12.9	10.8
940-C411-73	040-C411-73		9660A-041-173	13.7	11.5
940-C411-79	040-C411-79			16.5	13.8
940-C411-82	040-C411-82		9660A-041-182	17.8	14.9
940-C411-83	040-C411-83		9660A-041-183	18.2	15.3
940-C411-83	040-C411-83		9660C-3027-183	18.2	15.3
940-C411-91	040-C411-91		9660A-041-191	24.4	20.3
940-C411-91	040-C411-91		9660C-3027-191	24.4	

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
914-0006-02	014-0006-02	88	106	330
914-0006-03	014-0006-03	189	227	330
914-0006-09	014-0006-09	216	259	330
914-0006-10	014-0006-10	270	324	330
914-0006-11	014-0006-11	145	174	330
914-0006-12	014-0006-12	175	216	330
914-0006-03	014-0006-13	189	227	330
914-0006-09	014-0006-14	216	259	330
914-0006-10	014-0006-15	270	324	330
914-0006-11	014-0006-16	145	175	330
014-0006-12	014-0006-17	175	216	330
914-0008-48	014-0008-48	124	149	220
914-0008-50	014-0008-50	161	193	220
914-0008-51	014-0008-51	145	174	220
914-0008-61	014-0008-61	88	106	220
914-0008-62	014-0008-62	53	64	220
914-0008-63	014-0008-63	540	648	115
914-0008-64	014-0008-64	43	52	220
914-0008-65	014-0008-65	64	77	330
914-0008-66	014-0008-66	108	130	220
	014-0008-68	88	106	115
914-0008-70	014-0008-70	43	52	330
914-0008-71	014-0008-71	189	227	220
914-0008-72	014-0008-72	64	77	250

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
914-0008-73	014-0008-73	43	52	250
914-0008-74	014-0008-74	72	86	330
914-0008-79	014-0008-79	270	324	165
914-0032-00	014-0032-00	233	280	110
914-0032-06	014-0032-06	233	280	125
	014-0032-07	41	53	250
914-0036-00	014-0036-00	53	64	330
914-0036-01	014-0036-01	88	106	250
914-0036-03	014-0036-03	88	106	330
914-0036-04	014-0036-04	145	174	250
914-0036-05	014-0036-05	108	130	330
914-0036-07	014-0036-07	130	156	330
914-0036-11	014-0036-11	72	88	220
914-0036-13	014-0036-13	21	25	330
914-0036-01	014-0036-01	88	106	250
914-0036-03	014-0036-19	88	106	330
914-0036-04	014-0036-20	145	174	250
914-0036-05	014-0036-21	108	130	330
914-0036-07	014-0036-22	130	156	330
914-0036-08	014-0036-23	340	408	110
	014-0036-28	189	227	165
914-0053-00	014-0038-00	145	175	165
914-0053-01	014-0038-01	145	175	110
914-0053-02	014-0038-02	53	64	250

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
	014-0038-03	43	52	250
914-0053-04	014-0038-04	189	227	165
914-0053-05	014-0038-05	88	106	250
914-0053-06	014-0038-06	50	60	330
914-0053-07	014-0038-07	43	53	330
914-0053-10	014-0038-10	145	174	250
914-0053-10	014-0038-17	145	174	250
914-0053-13	014-0053-13	64	77	330
914-0053-00	014-0053-18	145	175	165
914-0053-01	014-0053-19	145	175	110
914-0053-02	014-0053-20	53	64	250
914-0053-09	014-0053-25	189	227	250
	014-0053-25	189	227	250
914-0053-10	014-0053-26	145	175	250
914-0053-11	014-0053-27	72	88	330
914-0053-13	014-0053-29	64	77	330
914-0053-14	014-0053-30	88	108	330
914-0053-15	014-0053-31	53	64	330
	014-0053-35	189	227	165
	014-0053-36	88	106	250
	014-0053-37	53	64	330
	014-0053-38	43	52	330
	014-0053-42	130	156	250
	014-0053-43	243	292	165

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
914-0006-03	014-0058-00	189	227	330
914-0006-10	014-0058-02	270	324	330
914-0006-11	014-0058-03	145	174	330
914-0006-12	014-0058-04	175	216	330
	014-0058-05	460	552	110
914-0008-48	014-0058-06	124	149	220
914-0008-49	014-0058-07	400	480	110
914-0008-50	014-0058-08	161	193	220
914-0008-51	014-0058-09	145	174	220
914-0008-52	014-0058-10	430	516	125
914-0008-57	014-0058-11	243	292	110
914-0008-58	014-0058-12	324	389	110
914-0008-59	014-0058-13	590	708	110
914-0008-61	014-0058-14	88	106	220
	014-0058-15	53	64	220
914-0008-63	014-0058-16	540	648	110
914-0008-64	014-0058-17	43	52	220
914-0008-65	014-0058-18	64	77	330
914-0008-66	014-0058-19	108	130	220
914-0008-69	014-0058-20	270	324	110
914-0008-70	014-0058-21	43	52	330
914-0008-71	014-0058-22	189	227	220
914-0008-72	014-0058-23	64	77	250
914-0008-73	014-0058-24	43	52	250

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
914-0008-74	014-0058-25	72	86	330
914-0008-78	014-0058-26	108	130	250
914-0008-79	014-0058-27	270	324	165
914-0036-00	014-0058-28	53	64	330
914-0036-01	014-0058-29	88	106	250
914-0036-02	014-0058-30	130	156	250
914-0036-03	014-0058-31	88	106	330
914-0036-04	014-0058-32	145	174	250
914-0036-05	014-0058-33	108	130	330
914-0036-07	014-0058-34	130	156	330
914-0036-08	014-0058-35	340	408	110
914-0036-09	014-0058-36	243	292	165
914-0036-11	014-0058-37	72	88	220
914-0036-12	014-0058-38	189	227	250
	014-0058-40	189	227	165
	014-0058-41	340	408	165
	014-0058-43	243	292	250
914-0053-00	014-0059-00	145	175	165
914-0053-01	014-0059-01	145	175	110
914-0053-02	014-0059-02	53	64	250
914-0053-04				
914-0053-05	014-0059-04	88	106	250
914-0053-06	014-0059-05	53	64	330
914-0053-07	014-0059-06	43	52	330

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
914-0053-09	014-0059-07	189	227	250
914-0053-10	014-0059-08	145	174	250
914-0053-11	014-0059-09	72	88	330
914-0053-13	014-0059-11	64	77	330
914-0053-14				
914-0053-15	014-0059-13	53	64	330
914-0053-16	014-0059-14	130	156	330
	014-0059-18			
	014-0059-20			
	014-0061-00	460	552	110
914-0008-48	014-0061-01	124	149	220
914-0008-49	014-0061-02	400	480	110
914-0008-50	014-0061-03	161	193	220
914-0008-51	014-0061-04	145	175	220
914-0008-52	014-0061-05	430	516	125
914-0008-57	014-0061-06	243	292	110
914-0008-58	014-0061-07	324	389	110
914-0008-59	014-0061-08	590	708	110
914-0008-61	014-0061-09	88	106	220
	014-0061-10	53	64	220
914-0008-63	014-0061-11	540	648	110
914-0008-64	014-0061-12	43	52	220
914-0008-65	014-0061-13	64	77	330
914-0008-66	014-0061-14	108	130	220

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
914-0008-69	014-0061-15	270	324	110
914-0008-70	014-0061-16	43	52	330
914-0008-71	014-0061-17	189	227	220
914-0008-72	014-0061-18	64	77	250
914-0008-73	014-0061-19	43	52	250
914-0008-74	014-0061-20	72	86	330
914-0008-78	014-0061-21	108	130	250
914-0008-79	014-0061-22	270	324	165
	014-0061-23	340	408	165
	014-0061-24	53	64	330
	014-0061-25	88	106	250
914-0037-07	014-0061-26	130	156	250
	014-0061-27	88	106	330
	014-0061-28	145	175	250
	014-0061-29	108	130	330
	014-0061-30	130	156	330
	014-0061-31	340	408	110
	014-0061-32	243	292	165
	014-0061-33	189	227	250
	014-0061-34	243	292	250
914-0037-17	014-0064-13	x	x	x
	014-0064-09	15	0	440
	014-0064-33	17.5	0	440
	014-0072-00	72	88	220

Start Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD-Low	MFD-High	Cap Volts
	014-0072-02	189	227	165
914-0053-16	014-0073-01	130	156	330

Run Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD	Cap Volts	Wholesaler P/N	Copeland® Brand P/N	MFD	Cap Volts
	014-0011-01	5	330	914-0037-38	014-0037-38	80	370
	014-0011-04	11	330	914-0037-39	014-0037-39	55	370
914-0037-04	014-0037-04	10	370	914-0037-40	014-0037-40	50	370
	014-0037-05	12.5	370		014-0041-00	60	370
914-0037-06	014-0037-06	15	370		014-0041-01	80	370
914-0037-07	014-0037-07	17.5	370		014-0048-12	40	370
914-0037-08	014-0037-08	20	370		014-0048-18	40	440
914-0037-09	014-0037-09	25	370		014-0048-20	50	440
914-0037-10	014-0037-10	30	370		014-0048-21	55	440
914-0037-11	014-0037-11	35	370		014-0048-22	60	440
914-0037-12	014-0037-12	40	370		014-0048-36	45	370
914-0037-13	014-0037-13	15	440		014-0048-37	60	370
914-0037-14	014-0037-14	20	440		014-0048-38	80	370
914-0037-16	014-0037-16	30	440		014-0048-39	55	370
914-0037-17	014-0037-17	35	440		014-0048-40	50	370
914-0037-18	014-0037-18	40	440		014-0048-51	70	370
914-0037-19	014-0037-19	45	440	914-0037-04	014-0064-00	10	370
914-0037-20	014-0037-20				014-0064-01	12.5	370
914-0037-21	014-0037-21			914-0037-06	014-0064-02	15	370
914-0037-22	014-0037-22	60	440	914-0037-07	014-0064-03	17.5	370
914-0037-23	014-0037-23			914-0037-08	014-0064-04	20	370
914-0037-11	014-0037-28	35	370	914-0037-09	014-0064-05	25	370
914-0037-36	014-0037-36	45	370	914-0037-10	014-0064-06	30	370
914-0037-37	014-0037-37	60	370	914-0037-11	014-0064-07	35	370

Run Capacitor Data

Wholesaler P/N	Copeland® Brand P/N	MFD	Cap Volts	Wholesaler P/N	Copeland® Brand P/N	MFD	Cap Volts
914-0037-12	014-0064-08	40	370	914-0037-52	014-0064-35	80	440
914-0037-13	014-0064-09	15	440		014-0064-36	10	440
914-0037-14	014-0064-10	20	440				
914-0037-15	014-0064-11	25	440				
914-0037-16	014-0064-12	30	440				
914-0037-17	014-0064-13	35	440				
914-0037-18	014-0064-14	40	440				
914-0037-19	014-0064-15	45	440				
914-0037-20	014-0064-16	50	440				
914-0037-21	014-0064-17	55	440				
914-0037-22	014-0064-18	60	440				
914-0037-23	014-0064-19	25	482				
914-0037-29	014-0064-23	7.5	330				
914-0037-30	014-0064-24	5	330				
914-0037-36	014-0064-25	45	370				
914-0037-37	014-0064-26	60	370				
914-0037-38	014-0064-27	80	370				
914-0037-39	014-0064-28	55	370				
914-0037-40	014-0064-29	50	370				
914-0037-46	014-0064-30	80	370				
914-0037-48	014-0064-31	15	440				
914-0037-49	014-0064-32	20	440				
914-0037-50	014-0064-33	17.5	440				
914-0037-51	014-0064-34	70	370				