

Copeland® Service CR Compressor Cross Reference Guide

Copeland® Single Phase Compressor Models

TONNAGE	CR6/CR5	CRKQ	CR7	CR1,2,3	CRKF	CRKH	ZRK5/K3/KC
1.5T	CR14K6-PFV		CR14K7-PFV				ZR16K5-PFV
	CR16K6-PFV	CR16KQ-PFV	CR16K7-PFV	CRZ4-0150-PFV	CR16KF-PFV		
	CR16K6-PFJ			CRZ4-0150-PFJ			
	CR18K6-PFV	CR18KQ-PFV	CR18K7-PFV	CRA1-0150-PFV	CR18KF-PFV	CR18KH-PFV	ZR18K5-PFV
	CR18K6-PFJ			CRA4-0150-PFV CRA1-0150-PFJ CRB1-0175-PFJ			
2T	CR20K6-PFV	CR20KQ-PFV	CR19K7-PFV	CRB1-0175-PFV CRB4-0175-PFV	CR20KF-PFV	CR20KH-PFV	ZR21K5-PFV
	CR22K6-PFV	CR22KQ-PFV	CR21K7-PFV CR23K7-PFV	CRC1-0175-PFV CRC4-0175-PFV	CR22KF-PFV		ZR21K5-PFJ
	CR22K6-PFJ			CRC1-0175-PFJ			ZR25K5-PFV
	CR24K6-PFV	CR24KQ-PFV	CR24K7-PFV	CRD1-0200-PFV CRD4-0200-PFV	CR24KF-PFV CR26KF-PFV		ZR25K5-PFJ
	CR24K6-PFJ			CRD1-0200-PFJ			ZR28K5-PFV
	CR28K6-PFV	CR28KQ-PFV	CR28K7-PFV	CRE2-0225-PFV CRE4-0225-PFV	CR28KF-PFV		ZR28K5-PFJ
	CR28K6-PFJ			CRE2-0225-PFJ			ZR32K5-PFV
	CR30K6-PFV	CR30KQ-PFV		CRF2-0250-PFV CRF4-0250-PFV	CR30KF-PFV		ZR32K5-PFJ
CR30K6-PFJ						ZR32K5-PFV	
3T	CR32K6-PFV	CR32KQ-PFV CR33KQ-PFV	CR31K7-PFV	CRG3-0250-PFV	CR32KF-PFV CR33KF-PFV		ZR32K5-PFJ
	CR32K6-PFJ			CRF2-0250-PFJ CRG3-0250-PFJ CRH3-0275-PFJ			ZR38K5-PFV
	CR34K6-PFV	CR34KQ-PFV		CRH3-0275-PFV	CR34KF-PFV		ZR38K5-PFJ
	CR35K6-PFV	CR36KQ-PFV	CR35K7-PFV	CRI3-0290-PFV	CR35KF-PFV		
	CR38K6-PFV	CR37KQ-PFV		CRJ3-0300-PFV CRJ3-0300-PFJ			
				CRK3-0325-PFV			ZR42K5-PFV
							ZR42K5-PFJ
3.5T	CR42K6-PFV	CR41KQ-PFV CRKQ-0325-PFV CRKQ-0325-PFJ					ZR48K5-PFV
4T		CR47KQ-PFV		CRL3-0350-PFV CRL3-0350-PFJ			ZR48K5-PFJ
4.5T	CRPQ-0450-PFV	CR53KQ-PFV		CRM3-0400-PFV			ZR54K5-PFV
	CRT5-0450-PFV						
	CRTQ-0450-PFV						
5T	CRP5-0450-PFV						ZR57K3-PFV
	CRN5-0500-PFV						
	CRNQ-0500-PFV						ZR61K3-PFV

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Copeland® Three Phase Compressor Models

	CR6/CR5	CRKQ	CR7	CR1,2,3	CRKF	CRKH	ZRK5/K3/KC
1.5T	CR18K6-TF5	CR18KQ-TF5		CRA1-0150-TF5			
	CR18K6-TFD	CR18KQ-TFD		CRA1-0150-TFD			
2T	CR22K6-TF5			CRC1-0175-TF5			ZR21K5-TF5
	CR22K6-TFD						ZR21K5-TFD
	CR24K6-TF5	CR24KQ-TF5		CRD1-0200-TF5			ZR25K5-TF5
	CR24K6-TFD	CR24KQ-TFD		CRD1-0200-TFD			ZR25K5-TFD
	CR28K6-TF5	CR28KQ-TF5	CR28K7-TF5	CRE1-0225-TF5			ZR28K5-TF5
				CRF1-0250-TF5			
	CR28K6-TFD	CR28KQ-TFD		CRE1-0225-TFD			ZR28K5-TFD
				CRF1-0250-TFD			
3T	CR30K6-TF5						ZR32K5-TF5
	CR30K6-TFD	CR30KQ-TFD					ZR32K5-TFD
	CR32K6-TF5	CR32KQ-TF5	CR31K7-TF5	CRG3-0250-TF5			ZR32K5-TF5
		CR33KQ-TF5					
	CR32K6-TFD	CR32KQ-TFD					ZR32K5-TFD
	CR32K6-TFE	CR33KQ-TFD		CRG3-0250-TFD			ZR32K5-TFE
	CR35K6-TF5	CR34KQ-TF5		CRH3-0275-TF5			ZR32K5-TF5
		CR36KQ-TF5		CRI3-0290-TF5			
	CR35K6-TFD	CR34KQ-TFD		CRH3-0275-TFD			ZR32K5-TFD
		CR36KQ-TFD		CRI3-0290-TFD			
	CR35K6-TFE			CRH3-0275-TFE			ZR32K5-TFE
	CR38K6-TF5	CR37KQ-TF5		CRJ3-0300-TF5			ZR38K5-TF5
	CR38K6-TFD	CR37KQ-TFD		CRJ3-0300-TFD			ZR38K5-TFD
	CR38K6-TFE			CRJ3-0300-TFE			ZR38K5-TFE
3.5T	CR42K6-TF5	CR41KQ-TF5		CRK3-0325-TF5			ZR42K5-TF5
		CRKQ-0325-TF5					
	CR42K6-TFD	CR41KQ-TFD		CRK3-0325-TFD			ZR42K5-TFD
		CRKQ-0325-TFD					
4T	CR42K6-TFE	CRKQ-0325-TFE		CRK3-0325-TFE			ZR42K5-TFE
		CR47KQ-TF5		CRL3-0350-TF5			ZR48K5-TF5
		CR47KQ-TFD		CRL3-0350-TFD			ZR48K5-TFD
4.5T				CRL3-0350-TFE			ZR48K5-TFE
	CRT5-0450-TF5	CR53KQ-TF5		CRM3-0400-TF5			ZR54K5-TF5
	CRTQ-0450-TF5						
	CRT5-0450-TFD	CR53KQ-TFD					ZR54K5-TFD
	CRTQ-0450-TFD			CRM3-0400-TFD			
	CRT5-0450-TFE						ZR54K5-TFE
5T	CRTQ-0450-TFE						
	CRP5-0450-TF5						ZR57K3-TF5
	CRPQ-0450-TF5						
	CRP5-0450-TFD						ZR57K3-TFD
	CRPQ-0450-TFD						
	CRP5-0450-TFE						ZR57K3-TFE
	CRPQ-0450-TFE						
	CRN5-0500-TF5						ZR61K3-TF5
	CRNQ-0500-TF5						
	CRN5-0500-TFD						ZR61K3-TFD
	CRNQ-0500-TFD						
	CRN5-0500-TFE						ZR61K3-TFE
CRNQ-0500-TFE							

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Copeland® Service CR Compressor Cross Reference Guide



Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
1.5T	CR14K6-PFV	H20B153ABC	AB5515G			
		H20J153ABC	AB5515H			
		H21B153	AJ1P13			
		H21J143ABC	AJ1R12			
		H21J14BABC	AJ5513E			
		H21J153ABC	AJ5513F			
		H21J15BABC	AJ5515F			
		H22B153	AJ5517E			
		H23B153ABC	AJ8516G			
		H23B15QABC	AJB5513EXR			
		H24B15QABC	AJC8516EXD			
		H28B13BABC	AJR15			
		H29B13UABC	AKA8513EXD			
		H29B14UABC	AKA8514EXD			
			AUR13			
			AW5513E			
			AWA5513EXD			
		AWH5513EXN				
		B1616				
		RK5515				
						ZR16K5-PFV
		CR16K6-PFV	H20J173ABC	AB5517G		MT018-1
			H23B15SABC	AB5517H		
			H23B16SABC	AJ5515E		
			H24B153ABC	AJ5515F		
			H25B15QABC	AJ5516E		
			H25B17QABC	AJ5516G		
	H26B15QCBC		AJ5517E			
	H26B17QCBC		AJ5517F			
	H27B15QCBC		AJ5517G			
	H29B15UABC		AJA5515EXD			
	H29B16UABC	AJA5516EXD				
		AJA5517EXD				
		AJB5515EXB				

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
1.5T	CR16K6-PFV		AJB5515EXD			ZR16K5-PFV
			AJB5517EXD			
			AJC5516EXD			
			AJR13			
			AJR15			
			AJT12			
			AKA8515EXD			
			AW5515E			
			AW5515G			
			AW5516H			
			AW5517			
			AW5517E			
			AW5517G			
			AW5517H			
			AWA5515EXD			
			AWA5517EXD			
			AWC5515EXD			
			AWC5517EXD			
			AWD5516EXD			
			AWD5517EXD			
			AWF5516EXN			
			AWF5517EXN			
			AWG5515EXN			
	AWG5517EXN					
	AWH5516EXN					
	AWJ5515EXN					
	B32M16					
RK5515E						
RKA5515EXD						
	CR16K6-PFJ	H20B173ABH	AB5517G			
		H23B153ABH	AJ5515E			
		H23B15QABH	AJ5517E			
		H25B17QABH	AJA5517EXV			

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
1.5T	CR16K6-PFJ		AJR15			
			AJT12			
			AW5517E			
			AW5517G			
			AW5517H			
			AWA5517EXV			
			AWC5517EXV			
			AWD5517EXV			
			AWF5516EVA			
	CR18K6-PFV	H20B173ABC	AB5519F	M*20		
		H20B193ABC	AB5519G			
		H21B173	AB5519H			
		H21B193	AJ5518E			
		H22B173	AJ5518G			
		H22B193	AJ8520E			
		H23B173ABC	AJ8520G			
		H23B17QABC	AJA5518EXD			
		H23B17SABC	AJC5518EXD			
		H23B18SABC	AJC8520EXD			
		H23B193ABC	AJT15			
		H23B19QABC	AW5517F			
		H24B17QABC	AW5519			
		H24B183ABC	AWB5517EXD			
		H25B18QABC	AWF5518EXN			
		H26B18QCBC	AWG5519EXN			
		H27B17QCBC	AWJ5519EXN			
		H27B18QCBC	B32P16			
		H29B17UABC	B74P18			
		H29B18UABC	RK5518E			
	H2EA193	RKA5518EXD				
	CR18K6-PFJ	H20B193ABH	AB5519F			
		H23B173ABH	AB5519G			
		H23B17QABH	AJ5518E			

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
1.5T	CR18K6-PFJ	H23B17SABH	AJ5519E			
		H23B18SABH	AJ8520H			
		H24B17QABH	AJA5518EXV			
		H24B19QABH	AJA5519EXV			
		H25B18QABH	AJD8520EXV			
		H29B17UABH	AJT15			
		H29B18UABH	AW5517F			
			AW5519E			
			AW5519F			
			AW5519G			
			AWA5519EXV			
			AWB5517EXV			
			AWB5519EXV			
			AWC5519EXV			
			AWF5518EVA			
			AWF5519EVA			
			AWG5517EVA			
			AWG5519EVA			
			AWJ5519EVA			
			RK5518E			
	RKA5518EVA					
	RKA5518EXV					

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
1.5T	CR18K6-TF5	H23B20QDBL	AB5520H			
		H24B17QDBL	AH20L12V			
			AH5520E			
			B32P16			
			B74T16			
	CR18K6-TFD	H23B203DBE	AB5520H			
		H23B20QDBE	AH20L12			
			AH20L12V			
			AH5520E			
			AH5520F			

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
2T	CR20K6-PFV	H20B203ABC	AB5520F			ZR21K5-PFV
		H21B203	AB5520G			
		H21J203ABC	AB5520H			
		H21J20BABC	AH20L12			
		H23B203ABC	AH20L12V			
		H23B20QABC	AH5519E			
		H24B19QABC	AH5520E			
		H24B20QABC	AH5520F			
		H2EB193ABC	AJ5519E			
		H2EB203ABC	AJ5519G			
		H2EB20SABC	AJA5519EXD			
		T21J205CBC	AJA8520EXD			
			AJC5519EXD			
			AW5519H			
			AWD5519EXD			
			AWF5519EXN			
		AWJ5520EXN				
		B74P18				
		B74T16				
		H20B213	AB5522F	J*22	MT022-1	
		H20B213ABC	AB5522G	M*23		
		H20B223ABC	AB5522H			
		H20J213ABC	AB5524F			
		H21B223	AH22M12			
		H21B223ABC	AH22M12V			
		H22B233	AH24P12V			
		H23B20SABC	AH5522E			
		H23B223ABC	AH5522F			
	H23B22QABC	AH5524E				
	H23B22SABC	AH8524E				
	H24B203ABC	AH8526E				
	H24B21QABC	AW5520				
	H24B22QABC	AW5520E				
	H25B20QABC	AW5520F				
	H25B22QABC	AW5520G				
	CR22K6-PFV					

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
2T	CR22K6-PFV	H26B20QCBC	AW5522			ZR21K5-PFV	
		H26B22QCBC	AW5522H				
		H27B20QCBC	AWA5520EXD				
		H27B22QCBC	AWB5520EXD				
		H29B20UABC	AWC5520EXD				
		H29B22UABC	AWD5522EXD				
		H29B22UCBC	AWF5520EXN				
		H2EA223	AWF5522EXN				
		H2EB223ABC	AWG4520EXN				
		T21J225CBC	AWG5520EXN				
		T27B224CBC	AWG5522EXN				
				AWH5522EXN			
				B21T18			
				E64U18			
		CR22K6-PFJ	H23B20SABH	AB5520F			ZR21K5-PFJ
			H23B22QABH	AB5520G			
			H23B22SABH	AB5522F			
			H25B22QABH	AB5522G			
			H29B20UABH	AH22M12			
			H29B22UABH	AH22M12V			
			H29B24UABH	AH5522E			
				AW5520E			
				AW5520F			
				AW5520G			
				AW5522E			
				AW5522F			
				AW5522G			
				AWA5520EXV			
		AWA5522EXV					
		AWB5520EXV					
		AWB5522EXV					
		AWC5520EXV					
		AWC5522EXV					

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
2T	CR22K6-PFJ		AWF5520EVA			ZR21K5-PFJ	
			AWF5522EVA				
			AWG5520EVA				
			AWG5522EVA				
			AWJ5522EVA				
	CR24K6-PFV		H20B243ABC	AB5524G	J*25		ZR25K5-PFV
			H20B263	AB5524H	M*24		
			H20J273ABC	AB5524S	M*27		
			H21B243	AH24P12			
			H22B253	AH24P12V			
			H23B243ABC	AH5524E			
			H23B24QABC	AH5524F			
			H23B24SABC	AH8529E			
			H24B223ABC	AW5524			
			H24B24QABC	AW5524H			
			H25B24QABC	AWD5524EXD			
			H25B26QABC	AWF5524EXN			
			H26B24QCBC	AWG4524EXN			
			H27B24QCBC	AWG5524EXN			
			H27B26QCBC	AWJ5524EXN			
			H29B24UABC	B02A			
			H2EA253	B21U18			
			H2EA253AB				
			T21J265CBC				
			T27B264CBC				
	CR24K6-PFJ		H23B223ABH	AB5524F			ZR25K5-PFJ
			H23B24SABH	AB5524G			
			H25B24QABH	AH24P12			
			H29B26UABH	AH24P12V			
				AH5524E			
				AH8526E			
				AH8529E			
		AW5524E					

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
2T	CR24K6-PFJ		AW5524F			ZR25K5-PFJ
			AW5524G			
			AW5525H			
			AWA5524EXV			
			AWB5524EXV			
			AWC5524EXV			
			AWD5524EXV			
			AWF5524EVA			
			AWG5524EVA			
			AWJ5524EVA			
	CR28K6-PFV	H20B263ABC	AB5526H	J*28		ZR28K5-PFV
		H20J303ABC	AB5527H	J*30		
		H21A273	AB5528G	M*30		
		H21A293	AB5528H	M*32		
		H21B263	AB5528S			
		H21B263ABC	AH28Q13			
		H21B283	AH28Q13V			
		H21J293ABC	AH5527E			
		H22A273	AH5527F			
		H23A263ABC	AH8532E			
		H23A283ABC	AHA5527EXD			
		H23B263ABC	AW5526G			
		H23B26QABC	AW5528			
		H23B26SABC	AW5528H			
		H23B28QABC	AWC5526EXD			
		H23B28SABC	AWD5528EXD			
		H24B263ABC	AWG5526EXN			
H24B26QABC	AWG5528EXN					
H25B28QABC	AWH5528EXN					
H26B26QCBC	AWJ5528EXN					
H26B28QCBC	B02B					
H27B28QCBC						
H29B26UABC						

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
2T	CR28K6-PFV	H29B28UABC				ZR28K5-PFV
		H2EA293				
		H2EB263ABC				
		H2EB26SABC				
		T27B284CBC				
	CR28K6-PFJ	H20B263ABH	AB5528G			ZR28K5-PFJ
		H20B283ABH	AH28Q13V			
		H23A263ABH	AH5527E			
		H23B26SABH	AH8532E			
		H23B28QABH	AW5526G			
		H23B28SABH	AW5528E			
		H24B26QABH	AW5528F			
		H24B28QABH	AW5528G			
		H25B26QABH	AWA5528EXV			
		H25B28QABH	AWB5528EXV			
		H29B28UABH	AWF5528EVA			
			AWG5528EVA			
			AWJ5528EVA			

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
2T	CR22K6-TF5	H25B22QDBL	AB5522H			ZR21K5-TF5
		H29B22UDBL	AH5522E			
			AH8524E			
			AH8526E			
			AW5520F			
			AW5520G			
			AW5520S			
			AW5522F			
			AW5522G			
			AWB5520EXT			
			AWB5522EXT			
			AWC5520EXT			

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
2T	CR22K6-TF5		AWC5522EXT			ZR21K5-TF5	
			AWE5520EXT				
			AWF5522EXT				
			AWG5520EXT				
	CR22K6-TFD		H23B223DBE	AB5522H		MT022-4	ZR21K5-TFD
			H23B22QDBE	AH22M12			
			H25B22QDBE	AH22M12V			
			H25B24QDBE	AH5522E			
			H29B22UDBV	AW5520F			
				AW5520G			
				AW5522F			
				AW5522G			
				AWB5520EXG			
				AWB5522EXG			
				AWC5520EXG			
				AWC5522EXG			
				AWF5522EXG			
				AWG5520EXG			
			CR24K6-TF5			H20J253DBL	
	H21J253DBL	AH24P12					
	H23B223DBD	AH24P12V					
	H23B223DBL	AH5524E					
	H23B22QDBD	AW5524E					
	H23B22QDBL	AW5524F					
	H23B24QDBL	AW5524G					
	H25B24QDBL	AW5525H					
	H29B24UDBL	AWB5524EXT					
		AWC5524EXT					
	AWD5524EXT						
	AWE5524EXT						
	AWF5524EXT						
	AWG5524EXT						
	B02A						

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
2T	CR24K6-TFD	H20J253DBV	AB5524H			ZR25K5-TFD
		H21J253DBV	AH24P12			
		H23B243DBE	AH24P12V			
		H23B24QDBE	AH5524E			
		H29B24UDBE	AW5524F			
		H29B24UDBV	AW5524G			
			AW5525H			
			AWB5524EXG			
			AWC5524EXG			
			AWD5524EXG			
			AWF5524EXG			
			AWG5524EXG			
	CR28K6-TF5	H20J293DBL	AB5528H			ZR28K5-TF5
		H21J303DBL	AH28Q13			
		H23A263DBL	AH28Q13V			
		H23B263DBD	AH5527E			
		H23B26QDBD	AH5527F			
		H23B26QDBL	AH8532E			
		H23B283DBD	AW5526G			
		H23B283DBL	AW5528F			
		H23B28QDBD	AW5528H			
		H25B28QDBL	AWB5528EXT			
		H29B26UDBL	AWC5526EXT			
		H29B28UDBL	AWD5528EXT			
	CR28K6-TFD	H20J293DBV	AB5528H			ZR28K5-TFD
		H23A263DBE	AH28Q13			
		H23B263DBE	AH28Q13V			
		H23B26QDBE	AH5527E			
		H23B28QDBE	AW5526G			
		H25B28QDBE	AW5528F			
H29B28UDBE		AW5528G				
H29B28UDBV		AW5528H				
		AWB5528EXG				
		AWC5526EXG				
		AWC5528EXG				
		AWD5528EXG				
	AWF5528EXG					
	AWG5530EXG					

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
3T	CR30K6-PFV	H20A303	AB5530G	R*30	MT028-1	ZR32K5-PFV
		H20B283ABC	AB5530H			
		H20B293	AH31S13			
		H20B313	AH31S13V			
		H21B273	AH31T13			
		H21B293	AH5530E			
		H22A293	AH5530F			
		H23B30QABC	AH5531E			
		H24B283ABC	AW5530			
		H24B28QABC	AWG5530EXN			
		H24B30QABC	CL26X12			
		H27A28QCBC	CL26Z12			
		H2EB283ABC				
		H2EB28SABC				
	CR30K6-PFJ	H23B30SABH	AB5530G			ZR32K5-PFJ
		H25B30QABH	AH31S13V			
		H29B30UABH	AH5530E			
			AW5530F			
			AWB5530EXV			
	CR32K6-PFV	H20A323	AH31T13	J*33	MT032-1	ZR32K5-PFV
		H20A343	AH31T13V	M*34		
		H20B293ABC	AH5531E			
		H20B313ABC	AH5531F			
		H21A313	AH5531G			
		H21A313ABC	AH5533E			
		H22A313	AH8538E			
		H23A303ABC	AV5532E			
		H23A323ABC	AVA5532EXN			
		H23B283ABC	AW5531H			
		H23B303ABC	AW5532			
		H23B30SABC	AWD5531EXD			
		H23B323ABC	AWG5532EXN			
		H23B32QABC	AWJ5532EXN			

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

3 Ton

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
3T	CR32K6-PFV	H23B32SABC	CL25X12			ZR32K5-PFV
		H23B33SABC	CL26X12			
		H24B29QABC				
		H24B31QABC				
		H25A32QCBC				
		H25B30QABC				
		H25B32QABC				
		H25B33EABC				
		H26A32QCBC				
		H26B30QCBC				
		H27A32QCBC				
		H27B30QCBC				
		H29B30UABC				
		H29B32UABC				
		H2EA323				
		H2EA333				
		H2EB323ABC				
		T27B324CBC				
	CR32K6-PFJ		AH31T13V			ZR32K5-PFJ
			AH5531E			
			AH5531G			
			AH8538E			
			AV5535E			
			AVA5532EXV			
			AVA5535EXV			
			AW5530E			
			AW5530G			
			AW5531H			
	AW5532E					
	AW5532F					
	AW5532G					
	AWA5530EXV					
	AWA5532EXV					

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
3T	CR32K6-PFJ		AWB5532EXV			ZR32K5-PFJ	
			AWD5531EXV				
			AWF5530EVA				
			AWF5532EVA				
			AWF5533EVA				
			AWG5530EVA				
			AWG5532EVA				
			AWJ5530EVA				
			AWJ5532EVA				
	CR34K6-PFV		H20A353	AH34X13	J*36		
			H21A343	AH5534E			
			H22A353	AH8539E			
			H23A353ABC	AV5535E			
			H23A35QABC	AV5535G			
			H23B35SABC	AWF5533EXN			
			H27B35QCBC				
	CR35K6-PFV		H25A35QCBC	AH8543E	M*35		ZR38K5-PFV
			H25A38QCBC	AV5535F	R*35		
			H25B35QABC	AV5535H			
			H26A35QCBC	AVA5535EXN			
			H26A38QCBC	AVB5535EXN			
			H27A35QCBC	AVD5535EXN			
			H27A38QCBC	JE300			
			H29A353CBC	TVA5535EXN			
			H29A383CBC	TVB5535EXN			
			H29B35UABC				
			H2EA363				
	CR38K6-PFV		H20A403	AH40X15	J*39	MT036-1	
			H21A373	AH5540E	M*40		
			H21A373ABC	AV5538E	R*39		
			H22A383	CL30Y14			
			H23A36QABC	CL31Y14			
			H23A383ABC	CL32ZA14			
			H28A383ABC	CL5538E			
				CL5538F			
				JE301			
				PJE300			
				PJE301			
						ZR38K5-PFJ	

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
3T	CR30K6-TF5	H20J323DBL	AW5530G			ZR32K5-TF5	
		H23A303DBL	AWC5530EXT				
		H23B28QDBL					
		H25B30QDBL					
		H29B30UDBL					
	CR30K6-TFD	H20J323DBV	AB5530H			ZR32K5-TFD	
		H23A303DBE	AW5530F				
		H23B283DBE	AW5530G				
		H23B303DBE	AWB5530EXG				
		H23B30QDBE	AWC5530EXG				
		H25A32QDBE	AWF5530EXG				
		H25B30QDBE	CL26X12				
		H26A32QDBE					
		H27A32QDBE					
		H29B30UDBE					
		H29B30UDBV					
		CR32K6-TF5	H20J353DBL				AB5530H
	H21A313DBL		AH31S13				
	H21J343DBL		AH31T13				
	H23A323DBL		AH31T13V				
	H23B303DBD		AH5531E				
	H23B30QDBD		AH8538E				
	H23B30QDBL		AV5532E				
	H23B323DBD		AVA5532EXT				
	H23B323DBL		AW5528G				
	H23B32QDBL		AW5530F				
	H25A32QDBL		AW5531H				
	H25B32QDBL		AW5532F				
	H25B33EDBL		AW5532G				
	H26A32QDBL		AWB5530EXT				
	H27A32QDBL		AWB5532EXT				
	H29A323DBL		AWC5528EXT				
	H29B32UDBL		AWC5532EXT				
H29B33UDBL	AWD5531EXT						
	AWF5528EXT						
	AWF5530EXT						
	AWF5532EXT						
	AWG5530EXT						

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
3T	CR32K6-TF5		AWG5532EXT			ZR32K5-TF5	
			CL25X12				
			CL26X12				
	CR32K6-TFD	H21A313DBE	AH31T13			MT028-4	ZR32K5-TFD
		H23A323DBE	AH31T13V				
		H23B323DBE	AH5531E				
		H25B32QDBE	AH5531G				
		H25B33EDBE	AH8538E				
			AV5532E				
			AV5533G				
			AVA5532EXG				
			AVB5533EXG				
			AW5531H				
			AW5532F				
			AW5532G				
			AWB5532EXG				
			AWC5532EXG				
			AWD5531EXG				
			AWF5532EXG				
			CL25X12				
	CR32K6-TFE	H20J293DBF	AVB5533EXH				ZR32K5-TFE
	CR35K6-TF5	H21A343DBL	AH34X13			MT032-3	ZR32K5-TF5
		H21J363DBL	AH5534E				
		H23A353DBL	AV5533E				
		H23A35QDBL	AV5533G				
		H23B32QDBD	AV5535E				
		H23B35QDBD	AV5535F				
		H23B35QDBL	AV5535G				
		H25B35QDBL	AVA5535EXT				
		H29B35UDBL	AVB5533EXT				
			AVB5535EXT				
			AVD5533EXT				
			AVD5535EXT				
		JE300					
		JE301					
		PJG300					
	PJG301						
	TVB5535EXT						

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
3T	CR35K6-TFD	H21A343DBE	AH34X13		MT032-4	ZR32K5-TFD
		H21J363DBV	AH5534E			
		H23A353DBE	AH8543E			
		H23A35QDBE	AV5535E			
		H23B32QDBE	AV5535F			
		H23B353DBE	AV5535G			
		H23B35QDBE	AVA5535EXG			
		H25B35QDBE	AVB5535EXG			
		H29A353DBV	AVD5535EXG			
		H29B35UDBE				
		H29B35UDBV				
	CR35K6-TFE	H20J353DBF	AVB5535EXH			ZR32K5-TFE
		H21J363DBF	TVA5535EXH			
		H25A35QDBF	TVB5535EXH			
		H25B35QDBF				
		H26A35QDBF				
		H29A353DBF				
		H29B33UDBF				
		H29B35UDBF				
	CR38K6-TF5	H20J383DBL	AH8543E			ZR38K5-TF5
		H21A373DBL	AV5538F			
		H21J383DBL	AV5538G			
		H23A383DBL	AVB5538EXT			
		H23A38QDBL	AVD5538EXT			
		H24A383DBL	CL30Y14			
		H25A38QDBL	CL31Y14			
		H26A38QDBL	CL5538E			
		H27A38QDBL	CL5538G			
		H28A383DBL	PJE300			
		H29A383DBL	PJE301			
		CR38K6-TFD	H20J403DBE			
	H21A373DBE		AV5538G			
	H23A383DBE		AVA5538EXG			
	H24A383DBE		AVB5538EXG			
	H25A38QDBE		CL30Y14			
	H26A38QDBE		CL31Y14			
	H27A38QDBE		CL5538E			
	H28A383DBV		CL5538G			
	H29A383DBV					
	H28A383DBF		AVB5538EXH			ZR38K5-TFE

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
3.5T	CR42K6-PFV	H20J443ABC	AH40X15	J*42	MT040-1	ZR42K5-PFV
		H21A413	AH5540E	J*45		
		H21A413ABC	AH5540F	P*46		
		H21J443ABC	AH5540G	PY4666		
		H21J44BABC	AH8548E			
		H22A423	CL32ZA14			
		H23A423ABC	CL36ZC14			
		H23A42QABC	CL5540E			
		H24A383ABC	CL5540F			
		H24A423ABC	TVA5540EXN			
		H25A42QCBC				
		H26A42QCBC				
		H26A46QCBC				
		H27A42QCBC				
		H28A423ABC				
		H29A423CBC				
		H29A443CBC				
	H2EA413					
					ZR42K5-PFJ	

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
3.5T	CR42K6-TF5	H20J443DBD	AH40X15		MT036-3	ZR42K5-TF5
		H21A413DBL	AH5540E		MT045-3	
		H23A423DBL	AH5540F			
		H23A42QDBL	AH8548E			
		H24A423DBL	AV5540F			
			AV5542E			
			AV5542F			
			AV5542G			
			AVA5542EXT			
			AVB5542EXT			
			AVD5542EXT			
			CL32ZA14			
			CL36ZC14			
			CL5540E			
			CL5540G			
			CL5544E			

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
3.5T	CR42K6-TF5		CL5544G			ZR42K5-TF5
	CR42K6-TFD	H20J423DBE	AH40X15		MT040-4	ZR42K5-TFD
		H20J443DBE	AH5540E			
		H21A413DBE	AH8548E			
		H23A38QDBE	AV5540F			
		H23A423DBE	AV5542E			
		H23A423DBW	AV5542F			
		H23A42QDBE	AV5542G			
		H25A42QDBE	AVA5542EXG			
		H26A42QDBE	AVB5541EXG			
		H28A423DBV	AVB5542EXG			
			AVD5542EXG			
			AVD5545EXG			
			CL32ZA14			
			CL5540E			
		CL5540G				
		CL5544E				
		CL5544G				
		SAA5540EXG				
	CR42K6-TFE	H20J443DBF	AVB5542EXH			ZR42K5-TFE
		H24A423DBF	AVD5542EXH			
		H28A423DBF	AVD5545EXH			
			TVA5540EXH			
		TVA5545EXH				

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
4T		H21A463	AG5546E	J*48	MT044-1	ZR48K5-PFV
		H21A463ABC	AG5546H	J*51		
		H23A463ABC	AGA5546EXN	M*42		
		H23A46QABC	AGB5546EXN	P*50		
			AV5546E			
			AV5546H			
			AVA5546EXN			
			AVC5546EXN			
			CL5544E			
			CL5544F			
			CL5544H			
			TVA5545EXN			

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
4T		H21A463DBL	AG5546E		MT040-3	ZR48K5-TF5	
		H23A503DBL	AGA5546EXT		MT044-3		
		H23A50QDBL	AV5545F				
			AV5546E				
			AV5548F				
			AV5549G				
			AVA5546EXT				
			AVB5549EXT				
			AVD5548EXT				
			SAA5545EXT				
			H23A50QDBE		AG5546E		MT044-4
					AG5546F		
					AG5546H		
				AGA5546EXG			
				AGB5546EXG			
				AGC5546EXG			
				AV5545F			
				AV5546E			
				AV5548F			
				AV5549G			
				AVA5546EXG			
				AVB5549EXG			
				AVD5548EXG			
				CL36ZC14			
		TVA5545EXG					
				ZR48K5-TFE			

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
4.5T	CRPQ-0450-PFV	H23A50QABC	CL40ZA17	P*53		ZR54K5-PFV	
		H23A543ABC	CL41ZA17	R*54			
		H24A583CBC	CL5550E				
		H28A583CBC	CL5550G				
		T26A564BBC	FE400				
			PFB400				
	CRT5-0450-PFV	H23A563ABC		PFB403			
				AG5553E			
				AG5553H			
				AGA5553EXN			
				AGB5553EXN			
	CRTQ-0450-PFV						

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
4.5T	CRT5-0450-TF5	H23A543DBL	AV5550E		MT050-3	ZR54K5-TF5
			AVD5550EXT		MT051-3	
			CL40ZA17			
			CL41ZA17			
			CL5550E			
			CL5550G			
			FE400			
			PFB400			
			PFB403			
	CRTQ-0450-TF5					
	CRT5-0450-TFD	H23A543DBE	CL40ZA17		MT050-4	ZR54K5-TFD
			CL41ZA17		MT051-4	
			CL5550E			
			CL5550G			
			FE400			
			PFB400			
	CRTQ-0450-TFD					
	CRT5-0450-TFE	H23A543DBF	AVD5558EXH		MT050-7	ZR54K5-TFE
			H23A563DBF	AVG5558EXH		
H28A583DBF						
CRTQ-0450-TFE						

Single Phase

	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
5T	CRP5-0450-PFV	H23A583ABC	TVA5558EXN		MT056-1	ZR57K3-PFV	
		H27A56QCBC					
	CRN5-0500-PFV		H23A623ABC	AG5561E	P*60	MT064-1	ZR61K3-PFV
			AG5561H	P*64			
			AGA5561EXN				
			AGB5561EXN				
			CL51ZH17				
			CL5562E				
			CL5562G				
			PFB500				
PFB503							
CRNQ-0500-PFV							

Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575

Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC	
5T	CRP5-0450-TF5		SF5558E		MT056-3	ZR57K3-TF5	
			SF5558EXT		MT057-3		
			SFA5558EXT				
			TVA5558EXT				
	CRPQ-0450-TF5						
	CRP5-0450-TFD		H23A583DBE	SAA5558EXG		MT056-4	ZR57K3-TFD
			H23A62QDBE	SF5558E		MT057-4	
			H27A56QDBE	SFA5558EXG			
				TVA5558EXG			
	CRPQ-0450-TFD						
	CRP5-0450-TFE			TVA5558EXH		MT056-7	ZR57K3-TFE
	CRPQ-0450-TFE						
	CRN5-0500-TF5		H23A623DBL	AG5561E		MT064-3	ZR61K3-TF5
			H23A62QDBL	AG5561H		MT065-3	
			H26A68QDBL	AG5568E			
H29A683DBL			AGA5561EXT				
			AGA5568EXT				
			AGB5561EXT				
	CL51ZH17						


Three Phase

TONNAGE	CR6/5T	BRISTOL	TECUMSEH	CARLYLE	DANFOSS	ZRK5/K3/KC
5T	CRN5-0500-TF5		CL5562E			ZR61K3-TF5
			CL5562G			
			PFB500			
			PFB503			
			SF5560E			
			SF5560EXT			
			SFA5560EXT			
			CRNQ-0500-TF5			
	CRN5-0500-TFD	H23A623DBE	AG5561E		MT064-4	ZR61K3-TFD
			AG5561F		MT065-4	
			AG5561H			
			AG5568E			
			AG5568F			
			AGA5561EXG			
			AGA5568EXG			
			AGB5561EXG			
			AGC5561EXG			
			AGC5568EXG			
			CL51ZH17			
			CL5562E			
			CL5562G			
			PFB500			
			PFB503			
SAA5561EXG						
SF5560E						
SFA5560EXG						
CRNQ-0500-TFD						
CRN5-0500-TFE	H23A623DBF				ZR61K3-TFE	
CRNQ-0500-TFE						


Legend	Voltage Code
	60-1-208/230
	60-1-265
	60-3-200/230
	60-3-460
	60-3-575



Configuration Details

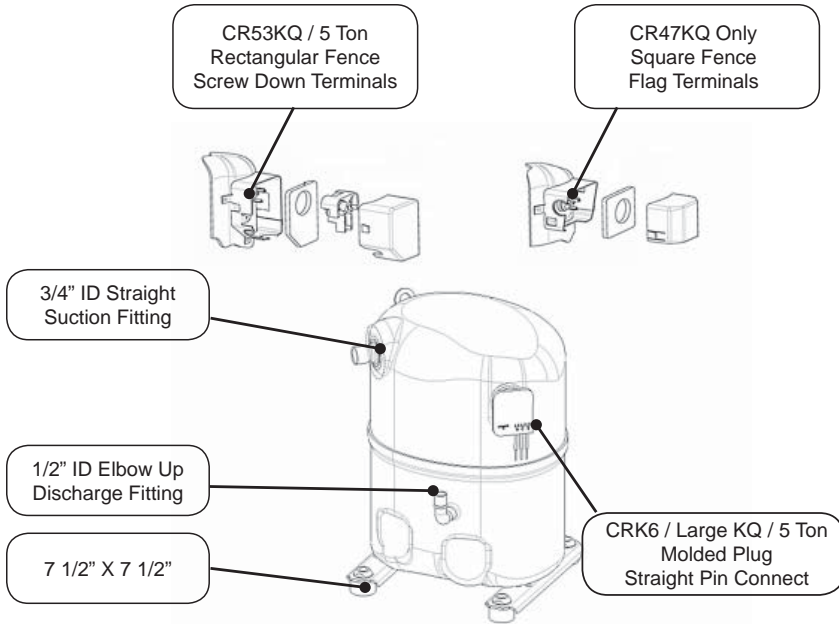

Crank Case Heater Mounting Location

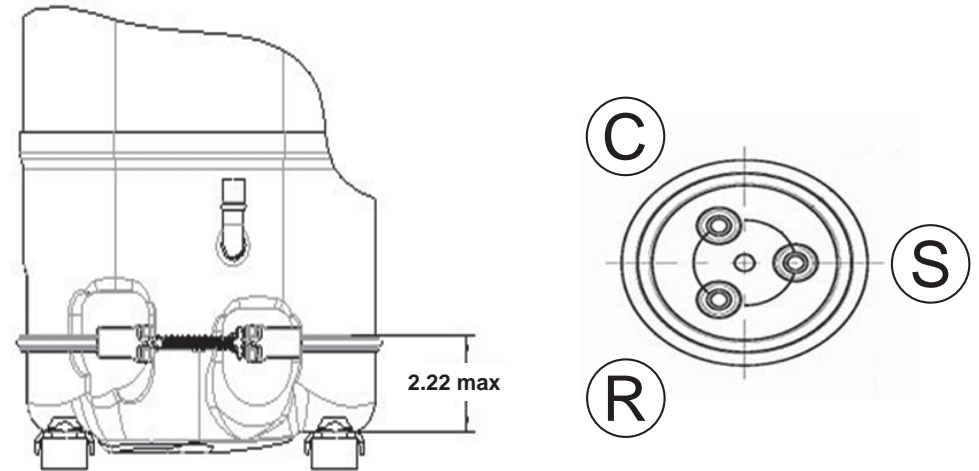


Additional Information


CR ACCESSORIES GUIDE		PART NUMBERS			
Part Name	Description	CRK6	CR47KQ	CR53KQ	5 Ton
Round Fence		x			
Rectangular Fence				x	x
Square Fence			x		
Molded Plug	10 Gage	529-0060-04			
	14 Gage	529-0060-05			
Mounting Parts	PFV, PFJ, PFZ (Single Phase)	527-0044-08			527-0116-00
	TF5, TFD, TFE, TFM (Three Phase)				
Poly Crank Case Heater	PFV, PFJ, PFZ, TF5	018-0088-00			018-0088-04
	TFD, TFE, TFM	018-0088-01			018-0088-05
Conduit Box Crank Case Heater	PFV, PFZ, PFJ, TF5	918-0076-02 (2011)			TBD
	TFD, TFE, TFM	918-0076-03 (2011)			TBD
Fitting Kit		536-0177-00	TBD		
2 port Service valve kit	7/8" ID		998-0510-90		
2 port Service valve kit	5/8" ID	998-0510-69			
Power Cable Conduit Kit		998-0529-04 (2011)			
Rotalock Adaptors	(Suction & Discharge)	998-0334-00	998-0334-01		
Rotalock Adaptors	(Suction Only)	998-0034-01	998-0034-02		
Rotalock Adaptors With port	(Suction Only)	998-0034-40 / 034-0168-00			

Copeland® CR Service Compressor Specification Chart


Model	ARI Capacity Btu/hr	RLA Amps (TF5/TFD)	Run Cap MFD / Volts	Start Cap. (Low-High / Volts)	Relay P/N	Height Inches (A)	Suction Height Inches (B)	Weight Lbs.
CR16K6-PFV	16300	9.6	25/370	43-52 / 330	040-0166-15	13.19	11.26	61
CR18K6-PFV	18000	10.4	25/370	43-52 / 330	040-0166-15	13.19	11.26	61
CR18K6-TFD	17700	3.07	N/A	N/A	N/A	13.19	11.26	61
CR20K6-PFV	19600	10.7	30/370	43-52 / 330	040-0166-19	13.19	11.26	61
CR22K6-PFV	22100	10.9	30/370	43-52 / 330	040-0166-19	13.19	11.26	61
CR22K6-TF5/D	22000	7.5/3.9	N/A	N/A	N/A	13.31	11.38	59
CR24K6-PFV	24500	12.4	35/370	43-52 / 330	040-0166-15	13.44	11.51	63
CR24K6-TF5/D	24000	7.7/4	N/A	N/A	N/A	13.44	11.51	60
CR26K6-PFV	26200	13.6	35/370	43-52 / 330	040-0001-60	13.56	11.63	65
CR28K6-PFV	28200	15.3	35/370	43-52 / 330	040-0166-19	13.56	11.63	64
CR28K6-TF5/D	28100	10/4.8	N/A	N/A	N/A	13.56	11.63	61
CR30K6-PFV	30000	16	35/370	43-52 / 330	040-0166-15	13.81	11.88	66
CR30K6-TF5/D	29800	10.4/4.9	N/A	N/A	N/A	13.81	11.88	63
CR32K6-PFV	32000	16.1	35/440	43-52 / 330	040-0166-14	13.81	11.88	66
CR32K6-TF5/D	31900	10/5.1	N/A	N/A	N/A	13.81	11.88	63
CR34K6-PFV	34500	16.6	50/370	64-77 / 330	040-0166-15	14.06	12.13	67
CR35K6-PFV	35000	18	40/370	64-77 / 330	040-0166-15	14.06	12.13	67
CR35K6-TF5/D	34900	11.4/4.8	N/A	N/A	N/A	14.06	12.13	65
CR38K6-PFV	38200	19	40/440	72-86 / 330	040-0166-19	14.31	12.38	70
CR38K6-TF5/D	37900	11.9/5.9	N/A	N/A	N/A	14.31	12.38	67
CR42K6-PFV	41900	20.4	40/440	64-77 / 330	040-0166-27	14.56	12.63	74
CR42K6-TF5/D	41700	14/6.4	N/A	N/A	N/A	14.56	12.63	69
CR47KQ-PFV	47500	24.6	45/440	64-77 / 330	040-0166-18	14.81	14.68	77
CR47KQ-TF5/D	47200	16/8.2	N/A	N/A	N/A	14.81	14.68	77
CR53KQ-PFV	53300	29	60/440	64-77 / 330	040-0166-18	14.81	14.68	77
CR53KQ-TF5/D	53200	18/9.1	N/A	N/A	N/A	14.81	14.68	77
CRPQ-0450-PFV	55400	30.7	45/440	64-77 / 330	040-0166-27	15.88	15.5	87
CRT5-0450-PFV	54100	30.7	45/440	64-77 / 330	040-0166-27	15.88	15.5	84
CRTQ-0450-PFV	54300	30.7	45/440	64-77 / 330	040-0166-27	15.88	15.5	84
CRP5-0450-PFV	58400	30.7	45/440	64-77 / 330	040-0166-27	15.88	15.5	87
CRT5-0450-TF5/D	54800	19.6/10.4	N/A	N/A	N/A	15.88	15.5	84
CRTQ-0450-TF5/D	54500	19.6/10.4	N/A	N/A	N/A	15.88	15.5	84
CRP5-0450-TF5/D	57000	19.6/10.4	N/A	N/A	N/A	15.88	15.5	82
CRPQ-0450-TF5/D	57300	19.6/10.4	N/A	N/A	N/A	15.88	15.5	82
CRN5-0500-PFV	60600	34.7	55/440	108-130 / 330	040-0166-27	16.12	15.68	91
CRNQ-0500-PFV	61100	34.3	55/440	108-130 / 330	040-0166-27	16.12	15.68	91
CRN5-0500-TF5/D	61300	21.4/9.6	N/A	N/A	N/A	16.12	15.68	90
CRNQ-0500-TF5/D	61500	21.4/9.6	N/A	N/A	N/A	16.12	15.68	90

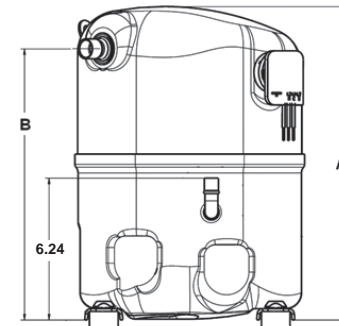

Notes CRK6
 Mounting pattern 7.5" x 7.5"
 Length 10.22" by width 9.65"
 Suction diameter 3/4" straight
 Add 0.28" to height if grommets included
 Discharge height is 6.24"

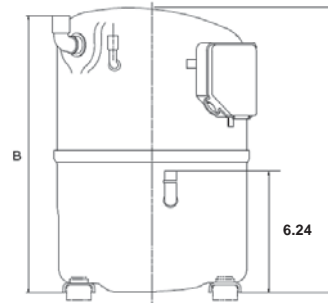

Notes Large CRKQ
 Mounting pattern 7.5" x 7.5"
 Length 10.62" by width 9.23"
 Suction diameter 7/8" elbow up
 Add 0.28" to height if grommets included
 Discharge height is 6.24"

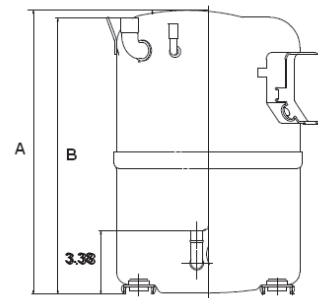

Notes 5 Ton
 Mounting pattern 7.5" x 7.5"
 Length 11.38" by width 9.38"
 Suction diameter 7/8" elbow up
 Add 0.28" to Height if grommets included
 Discharge height is 3.38"

Copeland CRK6 service compressor are offered in an -875 Bill-of-Material option, such as CR32K6-PFV-875, that includes the compressor with a 42 inch molded plug wiring harness, mounting parts, fitting kit, crank case heater and installation instructions.

EmersonClimate.com

2010ECT-93 (12/10) Emerson and Copeland Scroll are trademarks of Emerson Electric Co. or one of its affiliated companies
 ©2010 Emerson Climate Technologies, Inc. All rights reserved. Printed in the USA.

